


OPERATING INSTRUCTIONS

MAX SECURITY STEM / BUSHING SLEEVE AND FLUSH MOUNT ASSEMBLY

This operation may require 2 people

1. Slide the security stem and bushing sleeve inside flush mount.
Align hole "c" to hole "d"(see VIEW 1).
2. Once holes are aligned, insert pin to secure the security stem and bushing sleeve (see VIEW 2).

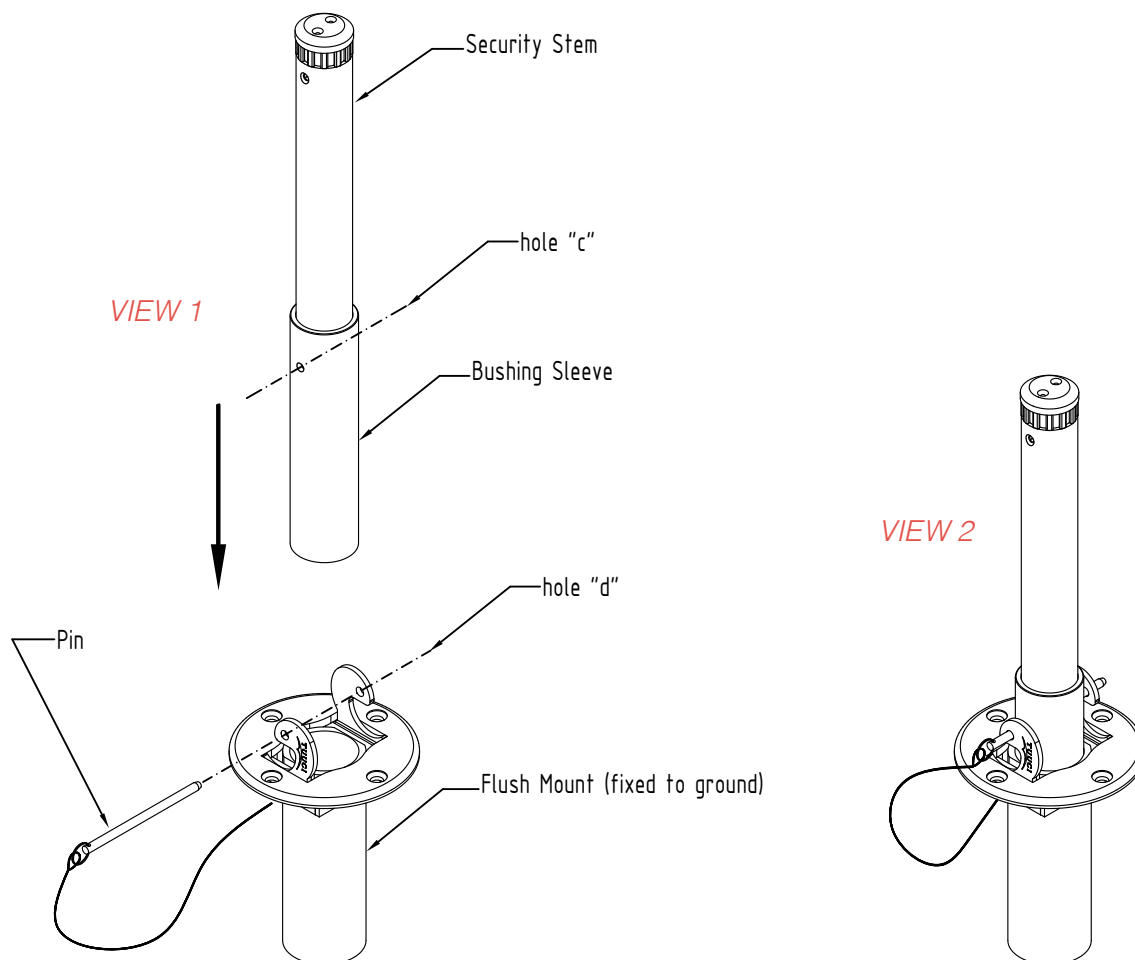

Global headquarters

2900 NW 35th Street
Miami, FL 33142 USA
Version date: 07/23/2014

t 305.634.5116
f 305.634.5119

info@tuuci.com
www.tuuci.com

